



GrowerSELECT  HOESLAP

WINDSTORM

54" SLANT WALL FAN

Windstorm™ 54" belt driven galvanized slant wall fan with cone and shutters. Shutters feature galvanized metal frame and aluminum shutters. Galvanized metal cone features perforated edges that allow fans to be installed closer to each other in retrofit applications, reducing the need to reframe each fan opening.



ITEM#	BESS TEST	0.00" SP		0.05" SP		0.10" SP		AIRFLOW RATIO
		CFM	CFM/WATT	CFM	CFM/WATT	CFM	CFM/WATT	
WS-54SBDLA	14344	28,400	23.6	27,100	21.5	25,400	19.2	.75

52" GALVANIZED BUTTERFLY FAN

The ideal fan for remodeling or adding extra CFM to increase the wind speed in your house. Designed to fit between the existing studs without costly extra construction.

WS-F52B2: High capacity | WS-F52B-HE2: High Efficiency


ITEM#	BESS TEST	0.00" SP		0.05" SP		0.10" SP		AIRFLOW RATIO
		CFM	CFM/WATT	CFM	CFM/WATT	CFM	CFM/WATT	
WS-F52B2A	14099	30,100	21.6	28,900	19.9	27,500	18.1	.81
WS-F52B-HE2	14100	27,700	25.2	26,300	22.7	24,700	20.4	.80





Model#: WS-52EBDBG

Description: FEATURES

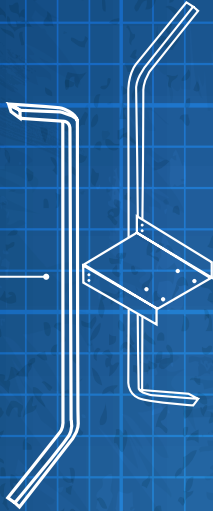


Feature Upgrade!
Stainless Steel Support System

S.S. uprights and motor can provide excellent corrosion protection.


Heavier Construction

- G90 Galvanized Steel
- 16 ga. venture
- 20 ga. housing
- 24 ga. cone

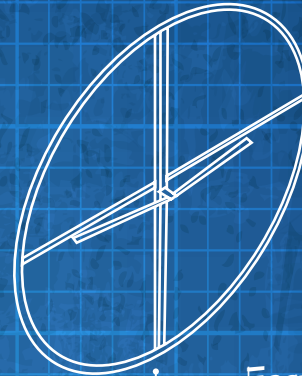


Feature Upgrade!
Superior Butterfly Shutter

Heavy Galvanized doors with stainless steel rods. Support ring is zinc plated then powder coated to prevent rust.

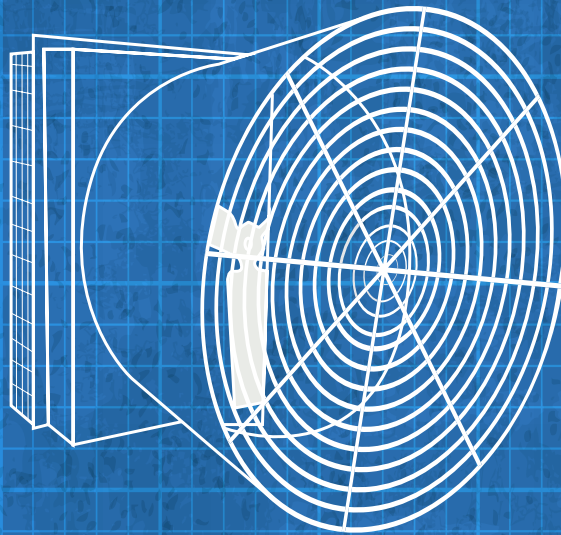


High S.F. Motors

Capably operates with varying rural voltage.

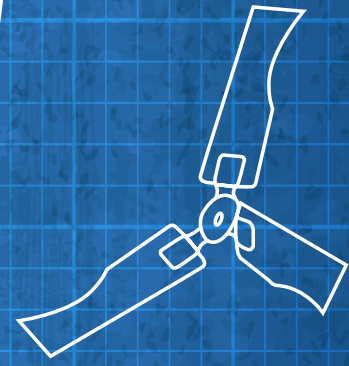

Motor-matched Prop
Galvanized 3-bladed

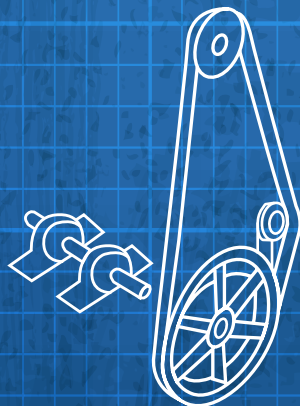

Self Adjusting Belt Tensioner

Automatically maintains correct belt tightness. Link style belt improves performance and reduces replacement cost. 1" shaft with permanently lubricated ball bearings prevent damage from dust contamination.